



CD200

Four Stage Conveyor Dishwasher - 500mm Rack

W 2700mm x D 765mm x H 1445mm

The Washtech Conveyor range represents the highest capacity dishwashers in the Washtech line up. These machines are built to wash large volumes of cups, plates and cutlery in a short period of time. Designed to work within complete operational systems, Washtech conveyors promote best practises helping to ensure timeframes, staff workloads, energy and water consumption are all reduced.

Washtech's CD200 is a fully automatic rack conveyor dishwasher with a versatile prewash zone, powerful wash zones and built in four stage EcoRinse. Configured to meet the specifications of each customer, CD200's are powerful machines that with the right accessories can be adapted to fit into relatively small spaces. Washtech's CD200 is the perfect machine for busy production kitchens, hospitals, prisons, exhibition centres and stadiums.

Standard Features

- · High volume 200 racks per hour
- · Rinse economiser only draws fresh water when racks are in the rinse zone
- · Powerful wash via removable upper and lower stainless steel wash arms
- · Powerful drive with safety clutch allows the machine to wash heavy items with ease
- · One prewash zone, two wash zones and a final rinse zone
- · Heavy duty stainless steel construction
- · Easy to maintain electromechanical design
- · Vent hoods fitted standard with duct connections and baffles
- · Easily fitted to benches and other accessories
- · Water consumption of just 180 litres per hour
- · CAD design service for layout options

Includes:

- 2 x 600 70028 500mm dish rack
- 2 x 600 70029 500mm cup rack
- · 2 x C660503 cutlery container
- 1x C660508 cutlery basket

Optional Upgrades Include*:

- · Complete Systems with many options:
 - Drier sections
 - Troughs
 - Setdown benches
 - · Sideload tables & Pawl drives
 - · Chain drives
 - Straight & curved roller tables
 - Bench limit switch



^{*}Upgrades will impact the cost of the machine and may extend the lead time.









CD200

Four Stage Conveyor Dishwasher - 500mm Rack

W 2700mm x D 765mm x H 1445mm





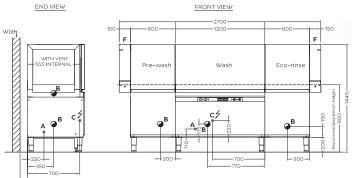

Recommended minimum of 100mm in which case all services can be located centred 50mm off wall, and bench depth = 750mm. Gap to wall may be reduced to 75mm and bench to 700mm but services must then come through floor in adjacent location as shown.

TOLERANCE FOR ALL DIMENSIONS ±5mm

moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au www.moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9413 2400 wasales@moffat.com.au

ISO9001

All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Moffat / 08 17

A Hot Water

Temperature Connection 3/4" male; hose supplied 200-350kPa Pressure Flow 20 litres per min Quality Potable & soft Backflow Prevention Atmospheric Vacuum Breaker Consumption 180 litres per hour

B Waste

Connection 1.5" BSP 2" BSP

C Electrical

415V 50Hz 35A/phase Three phase

Maximum Power Consumption Three phase 24.3kW

Heating

15.0kW Wash 15.0kW/5.0kW Rinse

Dimensions

Width 2700mm Depth 765mm 1445mm Height Weight 184kg

Packed Dimensions

2905mm Width Depth 875mm Height 1510mm Weight 440kg Cubicmetres

Water Quality Requirements

рΗ Hardness ppm Min 20 Max 100 8 SO Fe Mn Cu CL, Max mg/l 100 400 0.1 0.05 0.5

Refer operator manual for installation instructions

