





# Economy Compact Passthrough Dishwasher – 450mm Rack **W 650mm x D 650mm x H 1530mm**

Washtech's XM is a simple-to-use and easy-to-maintain compact passthrough dishwasher. With one of the industry's lowest water consumption rates along with leading rinse heating, the XM provides excellent wash results in less time, while being light on operating costs and the environment.

The XM features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech dishwasher will not let you down.

### **Standard Features**

- Autostart on hood closure 1, 2 and 3 minute wash cycles
- Washes up to 840 plates per hour/960 glasses per hour
- Low hot water consumption of 2.2 litres per cycle
- Washtech Hybrid Controls
- Self cleaning cycle
- QuikConnect (Plug & Play) installation, supplied complete with:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
  - 15 amp plugset
  - No commissioning required
- Heavy-duty stainless steel construction and manifold
- Upper and lower wash/rinse arms with precision moulded jets
- Easy-clean composite wash filter
- Watermark approved backflow prevention
- Comprehensive 5-2-1 warranty

## Includes:

- 2 x 600 70081 450mm dish rack
- 1x 600 70080 450mm cup rack
- 1x C660503 cutlery container
























# XM

## Economy Compact Passthrough Dishwasher - 450mm Rack W 650mm x D 650mm x H 1530mm

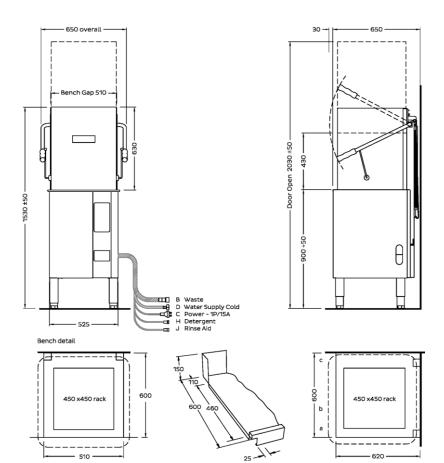

Α	Hot water Temperature Connection Pressure Flow Quality Backflow Prevention Consumption	200- 20 lit Pota Atmo	male 350k res p ble - osphe	; hose supp :Pa per min refer table eric Vacuur per cycle*	!
В	Waste Connection	Hose supplied for 38mm open standpipe 750 hig or connection to sink trap			
С	<b>Electrical</b> Single Phase	<b>V</b> 240	<b>Hz</b> 50	<b>A/phase</b> 15	<b>max kW</b> 3.37

Corner	Instal	lation	Notes:
5 M566		a+ £a	aala£+

- a. Machine must face left for easy access to controls b. Allow 300 clearance to front for service access

\*Consumption may vary with site conditions.

Depth Height Weight Cubicmetres	650 1530 73	750 1440 94 0.77
Water Quality pH Hardness ppm Cl- SO <sub>4</sub> Fe Mn Cu Cl <sub>2</sub>	<b>Min</b> 7 20	Max 8 100 100 400 0.1 0.5 0.05 0.1

Machine

650

Packed

695

c. Splashback return must be no higher than 150  $\,$ Referoperator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Isolating water valve must be readily accessible.





## Australia Moffat Pty Limited

## Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9158 3833 vsales@moffat.com.au

### **New South Wales**

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia Telephone 03-9518 3888 vsales@moffat.com.au

## Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

## Western Australia

Telephone 08-9202 6820 wasales@moffat.com.au



All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Version: 1806

an Ali Group Company

Dimensions

Width

