

UL / UL-B

Fully Insulated Premium Undercounter Dishwasher/Glasswasher –
500mm Rack

W 600mm x D 635mm x H 845mm

The Washtech Premium Range represents the most technologically advanced dishwashers in the Washtech line up. They are built to deliver the best wash results alongside the latest enhancements such as advanced electronic controllers, soft close doors, advanced filtration full thermal, and acoustic insulation to provide an optimal operating environment around the machine. Our assured rinse system ensures consistently great rinsing every cycle, while the soft start functionality protects your glassware and crockery.

The Washtech UL is the direct upgrade of the ever popular UD. Perfect for bars, cafes and other locations where high performance is required. Available now in a black stainless outer panel version.

Standard Features

- Quikstart 1, 2 and 3 minute cycles
- Washes up to 1,080 plates / 1,500 glasses per hour
- QuikConnect Installation with everything you need including:
 - Water supply hose
 - Dual detergent and rinse aid pumps with injector lines
 - Drain pump outlet hose
 - 15 amp plugset
 - No commissioning required
- Reliable results through robust stainless steel wash and rinse arms with precision stainless jets
- Durable stainless steel construction
- Moffat's Comprehensive 5-2-1 Warranty
- Low hot water consumption of 2.4 litres per cycle
- Assured final rinse ensures the correct temperature and pressures every time through 316 stainless break tank and rinse pump
- Soft start ensures great results through progressively pressurising the cycle to provide a consistent and even clean every time
- EcoPower reduces temperatures and energy consumption when machine is not being used
- Full thermal and acoustic insulation (via dual stainless steel panelling) to provide a cooler and quieter operating environment
- Enhanced filtration system that allows you to drain straight from the keypad, with no need to put your hand in the machine
- Soft close door enables smoother and quieter operation of the machine

Includes:

- 1x 600 70028 - 500mm dish rack
- 1x 600 70029 - 500mm cup rack
- 1x C660503 - cutlery container

Optional extras include*:


- Black stainless steel outer panels

* Manufactured to order and subject to extended delivery time.



UL / UL-B

Fully Insulated Premium Undercounter Dishwasher/Glasswasher – 500mm Rack
W 600mm x D 635mm x H 845mm

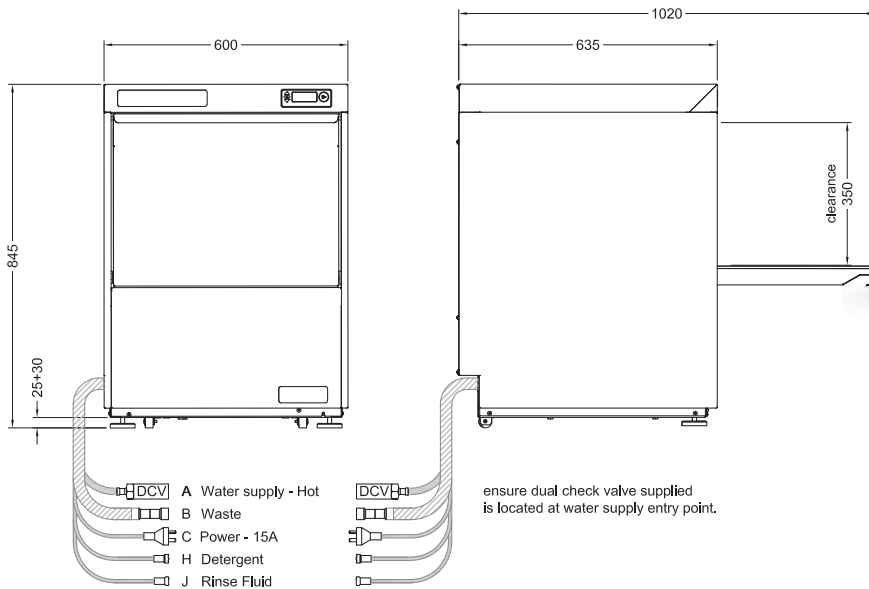

MOFFAT®

moffat.com.au

Australia
 Moffat Pty Limited

Victoria/Tasmania
 740 Springvale Road
 Mulgrave, Victoria 3170
 Telephone 03-9518 3888
 Facsimile 03-9518 3833
 vsales@moffat.com.au
 www.moffat.com.au

New South Wales
 Telephone 02-8833 4111
 nswsales@moffat.com.au

South Australia
 Telephone 03-9518 3888
 vsales@moffat.com.au

Queensland
 Telephone 07-3630 8600
 qldsales@moffat.com.au

Western Australia
 Telephone 08-9202 6820
 bgarcia@moffat.com.au

ISO9001
 All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
 Moffat / 11.16

A Hot Water	Temperature	65°C
	Connection	3/4" male hose supplied
	Pressure	200-350kPa
	Flow	15 litres per min
	Quality	Potable & soft
	Backflow Prevention	Dual Check Valve (DCV)
	Consumption	2.4 litres per cycle
B Waste	Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
C Electrical	Single phase	240V 50Hz 15A plugset supplied
	Three phase	415V 50Hz 15A/
	Maximum Power Consumption	
	Single phase	3.4kW
	Three phase	9.0kW
	Heating	
	Wash	2.5kW
	Rinse	3.0kW or 6.0kW

Dimensions	Width	600mm
	Depth	635mm
	Height	845mm
	Weight	74kg

Packed Dimensions	Width	720mm
	Depth	690mm
	Height	970mm
	Weight	92kg
	Cubicmetres	0.48m ³

Water Quality Requirements	Hardness	ppm	pH
	Min	20	7
	Max	100	8
	Ions	Cl ⁻ SO ₄ Fe Mn Cu CL ₂	
	Max mg/l	100 400 0.1 0.5 0.05 0.1	

Refer operator manual for installation instructions

