

XV

Economy Undercounter Dishwasher – 450mm Rack

W 535mm x D 595mm x H 845mm

Washtech's XV is a compact, highly efficient, simple-to-use and easy-to-maintain undercounter dishwasher. With one of the industry's lowest water consumption rates along with leading rinse heating, the XV provides excellent wash results in less time, while being light on operating costs and the environment.

The XV features Washtech Hybrid Controls which combine IP65 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech dishwasher will not let you down.

Standard Features

- QuikStart 1 and 2 minute wash cycles
- Washes up to 840 plates per hour/960 glasses per hour
- Low hot water consumption of 2.2 litres per cycle
- Washtech Hybrid Controls
- Self cleaning cycle
- QuikConnect (Plug & Play) Easy Installation supplied complete with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
 - 15 amp plugset
 - No commissioning required
- Heavy-duty stainless steel construction
- Upper and lower wash/rinse arms with precision moulded jets
- Easy-clean composite wash filter
- Compatible with 365mm to 450mm glass and dish racks
- Watermark approved backflow prevention
- Comprehensive 5-2-1 warranty


Includes:

- 1 x 600 70081 - 450mm dish rack
- 1 x 600 70080 - 450mm cup rack
- 1 x C660503 - cutlery container
- 1 x 216 10031 - rack adapter



XV

Economy Undercounter Dishwasher – 450mm Rack
W 535mm x D 595mm x H 845mm

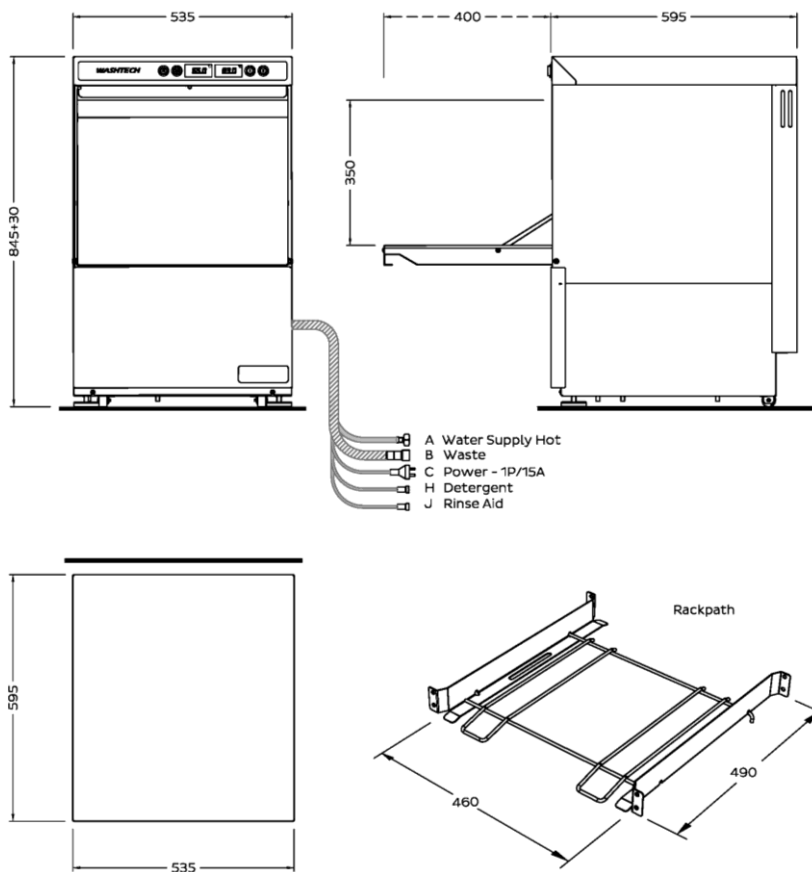

MOFFAT
moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9158 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
wasales@moffat.com.au



ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Version: 1806

A Hot water	
Temperature	65°C
Connection	3/4" male; hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable - refer table
Backflow Prevention	Atmospheric Vacuum Breaker
Consumption	2.2 litres per cycle*

B Waste	
Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap

C Electrical	V	Hz	A/phase	max kW
Single Phase	240	50	15	3.37

Dimensions	Machine	Packed
Width	535	645
Depth	595	610
Height	845	970
Weight	57	74
Cubicmetres		0.38

Water Quality	Min	Max
pH	7	8
Hardness ppm	20	100
Cl ⁻		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Isolating water valve must be readily accessible.

*Consumption may vary with site conditions.

an Ali Group Company



The Spirit of Excellence