

iD 60.60 D

Electric oven for pizza



EXTERNAL CONSTRUCTION

- Front structure made in folded stainless steel
- Oven panels made pre-painted metal sheets
- Door in stainless steel with shutter with hinge at bottom with balancing spring
- Door handle in stainless steel
- Tempered crystal glass
- Jutting control panel on the right front side
- Vapour outlet in stainless steel

INTERNAL CONSTRUCTION

- Baking surface in refractory brick
- Upper and lateral structure in aluminized sheet
- Thermal insulation in mineral wool

FUNCTIONING

- Heating by armoured heating elements
- Electronic temperature management with independent adjustment of ceiling and floor
- Electronic power management with independent adjustment of ceiling and floor
- Maximum temperature reached 450°C
- Continuous temperature monitoring with 2 thermocouple

STANDARD EQUIPMENT

- Illumination by halogen lamp
- Independent maximum temperature safety device

OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- Prover on wheels height 700 mm
- Prover on wheels height 1000 mm
- Support without trayholder slides, height 600 mm
- Support without trayholder slides, height 900 mm
- 4 wheels kit
- Additional trayholder slides
- Hood



MORETTI FORNI S.P.A.

www.morettiforni.com

marketing@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA


Tel. +39.0721.96161 - Fax +39.0721.9616299




iD 60.60 D

(assembled with support height 600 mm)


TOP VIEW

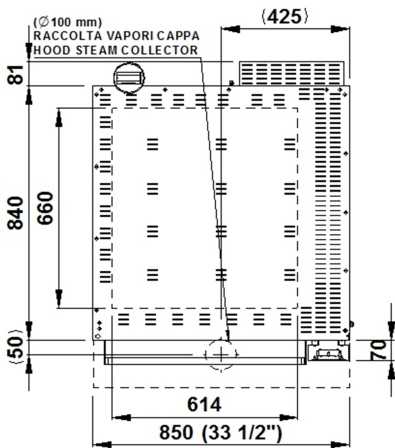

REAR VIEW

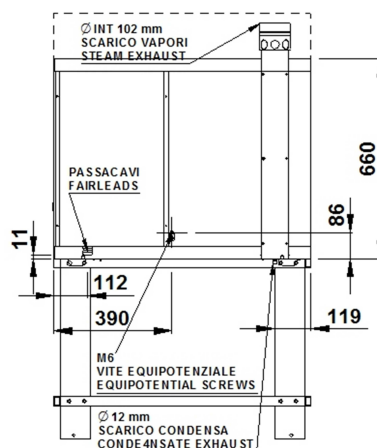

RIGHT SIDE VIEW

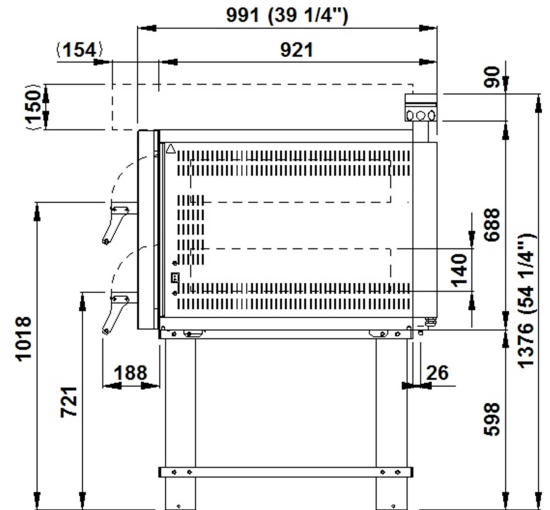

Note: The dimensions indicated in the views are in millimetres.

SPECIFICATIONS

The appliance comprises two independent cooking elements and an optional leavening compartment or support. The oven cooking surface is made of refractory material that provides perfectly even heat distribution over the whole surface, making this oven particular suitable to cook pizza, either directly on the surface or in trays. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

All the data provided below refer to the configuration with 2 chambers

DIMENSIONS

External height	778mm
External depth	991mm
External width	850mm
Weight	133kg
Total baking surface	0,8m ²

SHIPPING INFORMATION

Packed oven sizes	
Max height	840mm
Max depth	1060mm
Max width	920mm
Weight	(133+14)kg

FEEDING AND POWER

<i>Standard power supply</i>	
A.C. V400 3N	
<i>Optional power supply</i>	
A.C. V230 3, A.C. V230 1N	
Frequency	50/60Hz
Max power	8,4kW
Average power cons.	4,2kWh
Connecting cable for each chamber	
type H05RN-F	
5x2,5 mm ² (V400 3N)	
4x4 mm ² (V230 3)	
3x6 mm ² (V230 1N)	
Power supply (optional prover)	
A.C. V230 1N 50/60 Hz	
Max power	1kW
Average power cons.	0,5kWh
Conn. cable type	H07RN-F 3x1,5 mm ²

TOTAL BAKING CAPACITY

Pizza diameter 300mm	8
Pizza diameter 450mm	2
Tray (600x600)mm	2

*This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice