



# iD 72.72 M

Electric oven for pizza



### **EXTERNAL CONSTRUCTION**

	Front structure made in folded stainless steel Oven panels made pre-painted metal sheets Door in stainless steel with shutter with hinge at bottom with balancing spring Door handle in stainless steel Tempered crystal glass Jutting control panel on the right front side Vapour outlet in stainless steel			
INTERNAL CONSTRUCTION				

☐ Upper and lateral structure in aluminized sheet

# ☐ Baking surface in refractory brick

☐ Thermal insulation in mineral wool

FUNCTIONING							
	Heating by armoured heating elements						
	Electronic temperature management						
	independent adjustment of ceiling and floor						
	Electronic power management						
	independent adjustment of ceiling and floor						
	Maximum temperature reached 450℃						
	Continuous temperature monitoring wit	h 2					

# STANDARD EQUIPMENT

thermocouple

Illumination by halogen lamp			
Independent	maximum	temperature	safety
device			

OPTIONS AND ACCESSORIES (WITH SURCHARGE)				
_	Prover on wheels height 1000 mm			
	4 wheels kit			
	Additional trayholder slides			
	Hood			




#### **MORETTI FORNI S.P.A.**

www.morettiforni.com marketing@morettiforni.com Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA Tel. +39.0721.96161 - Fax +39.0721.9616299



## iD 72.72 M

(assembled with support height 900 mm)

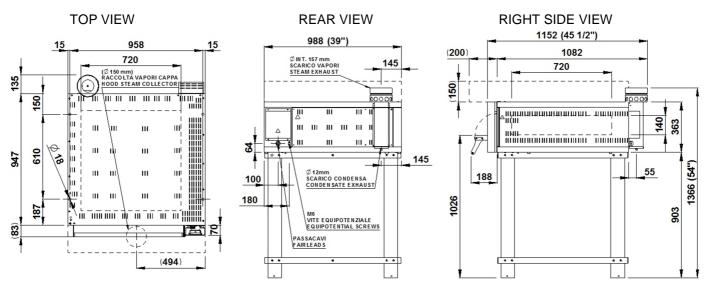

Note: The dimensions indicated in the views are in millimetres.

#### **SPECIFICATIONS**

The appliance comprises one cooking elements and an optional leavening compartment or support. The oven cooking surface is made of refractory material that provides perfectly even heat distribution over the whole surface, making this oven particular suitable to cook pizza, either directly on the surface or in trays. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C

### All the data provided below refer to the configuration with 1 chamber

#### **DIMENSIONS** SHIPPING INFORMATION **FEEDING AND POWER** External height 463mm Packed oven sizes Standard power supply External depth 1082mm Max height 550mm A.C. V400 3N External width 988mm Max depth 1160mm Optional power supply 105kg Max width A.C. V230 3 Weight 1180mm Total baking surface 50/60Hz 0,5m Weight (105+21)kg Frequency Max power 6kW TOTAL BAKING CAPACITY 3kWh Average power cons. Connecting cable Pizza diameter 350mm type H05RN-F 4 5x4 mm<sup>2</sup> (V400 3N) 4x6 mm<sup>2</sup> (V230 3) Pizza diameter 450mm 1 Tray (600x600)mm Power supply (optional prover) A.C. V230 1N 50/60 Hz Max power 1kW Average power cons. 0.8kWh Conn. cable type H07RN-F 3x1,5 mm<sup>2</sup>

<sup>\*</sup>This value is subject to variation according to the way in which the equipment is used

<sup>-</sup> NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice