



iD 65.105 M

Electric oven for pizza



EXTERNAL CONSTRUCTION

	Front structure made in folded stainless steel Oven panels made pre-painted metal sheets Door in stainless steel with shutter with hinge at bottom with balancing spring Door handle in stainless steel Tempered crystal glass Jutting control panel on the right front side Vapour outlet in stainless steel
NT	ERNAL CONSTRUCTION
	Baking surface in refractory brick

☐ Thermal insulation in mineral wool

FUNCTIONING						
	Heating by a	rmoured heati	ng elements			
	Electronic	temperature	managemer	nt w	ith	
	independent	adjustment of	ceiling and fl	loor		
	Electronic	power r	management	W	ith	
	independent	adjustment of	ceiling and fl	loor		
	Maximum te	mperature rea	ched 450℃			
	Continuous	temperature	monitoring	with	2	

☐ Upper and lateral structure in aluminized sheet

STANDARD EQUIPMENT

thermocouple

Illumination by	y halogen lar	mp	
Independent	maximum	temperature	safety
device			

OPTIONS AND ACCESSORIES (WITH SURCHARGE)		
_	Prover on wheels height 1000 mm	
	- · · · · · · · · · · · · · · · · · · ·	
	Support without trayholder slides, height 900 mm	
	4 wheels kit	
	Additional trayholder slides	
	Hood	




MORETTI FORNI S.P.A.

www.morettiforni.com marketing@morettiforni.com Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA Tel. +39.0721.96161 - Fax +39.0721.9616299



iD 65.105 M

(assembled with support height 900 mm)

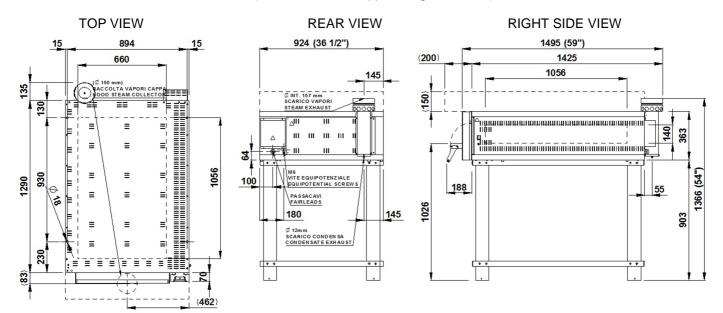

Note: The dimensions indicated in the views are in millimetres.

SPECIFICATIONS

The appliance comprises one cooking elements and an optional leavening compartment or support. The oven cooking surface is made of refractory material that provides perfectly even heat distribution over the whole surface, making this oven particular suitable to cook pizza, either directly on the surface or in trays. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C, whereas the maximum temperature of the baking chamber is 450°C.

All the data provided below refer to the configuration with 1 chamber

SHIPPING INFORMATION **DIMENSIONS FEEDING AND POWER** 463mm Packed oven sizes External height Standard power supply External depth A.C. V400 3N 1495mm Max height 550mm External width 924mm Max depth 1500mm Optional power supply 118kg Weight Max width 1110mm A.C. V230 3 Total baking surface Weight 50/60Hz $0.7m^{2}$ (118+21)kgFrequency Max power 7.7kW **TOTAL BAKING CAPACITY** Average power cons. 3,8kWh Connecting cable Pizza diameter 300mm type H05RN-F 6 5x4 mm² (V400 3N) 4x6 mm² (V230 3) Pizza diameter 450mm 2 Tray (600x450)mm 2 Power supply (optional prover) A.C. V230 1N 50/60 Hz 1,5kW Max power Average power cons. 0,8kWh Conn. cable type H07RN-F 3x1,5 mm²

^{*}This value is subject to variation according to the way in which the equipment is used

⁻ NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice