## specifications


## SIR Refrigeration

## **BME1200-A Series**

ActiveCore Series, 2 Door (Glass), Upright Fridge

Project:

Item No:

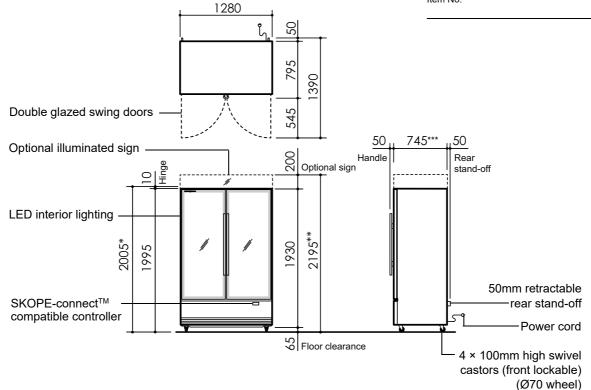

**CABINET** 

 Model ID
 BME1200N-A
 BME1200N-AC

 SKOPE ID
 SM12GYN
 SM12BYN

Doors 2 × self-closing, double glazed, single Low-E, lockable, argon filled,

toughened safety glass swing door (hinged LH, RH) 2 × door openings: 1454mm high × 525mm wide

Internal door opening 2 × door openings: 1454mm high × 525mm wide

Shelves 8 × wire and 2 × 10 × wire and 2× stainless steel

stainless steel

stainless steel
Wire shelves: Adjustable height, 577mm wide × 520mm deep

Stainless steel bottom shelf. Not adjustable, 580mm wide × 515mm deep

Sign n.a. Illuminated sign

Material Powdercoat galvanized steel

**PERFORMANCE** 

Max. ambient temp. 43°C

Temperature range 1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior side lighting 2 × 1370mm, 15W LED 2 × 1370mm, 15W LED

Interior shelf lighting n.a. n.a.

Sign lighting n.a. | 1 × 1200mm, 14W LED

Power cord Supplied with 2.0m, 10 Amp plug and lead

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 3.0 Amps (includes unit 2.6 Amps)

REFRIGERATION

Controller | SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Bottom mounted, integral, removable ActiveCore refrigeration unit

(UBHCNI-0008)

Refrigerant R290 / 99g (natural refrigerant)

Nominal capacity 740 Watts

Heat rejection (Avg/peak) 150 Watts/205 Watts
Drainage No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2018\ SKOPE\ Industries\ Limited\ and\ property and\ prop$ 

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
Height	2005mm* /	1454mm	
	2195mm**		
Width	1280mm	1180mm	
Depth	795mm	602mm	
Floor area	1.08m <sup>2</sup>		
Weight	245kg		
Volume		1079 litres	

- Height 2005mm without sign (BME1200-A)
- \*\* Height 2195mm with sign (BME1200-AC)
- \*\*\* Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

Dimensional tolerances			
Before installing this dimensional tolerand		llowing	
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements	
Тор	50mm
Sides	Not required
Back	50mm
Bottom	50mm

PSS0521 Rev. 2.2 Oct. 2019



