

## specifications

## Refrigeration

## RF6.UBR.1.SD

ReFlex Series, 1 Door (Solid), Underbench Fridge



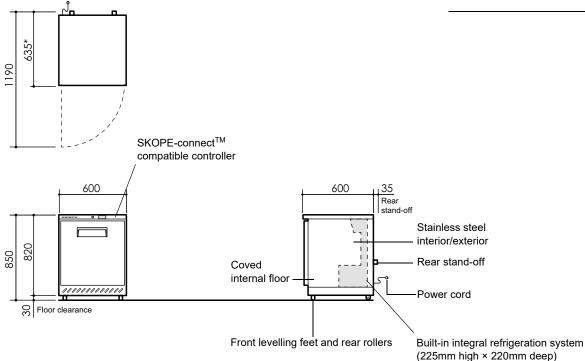

**CABINET** 

Model ID RF6.UBR.1.SD SKOPE ID RB1R

Door 1 × self-closing, lockable, reversible, solid swing door (hinged RH)

Internal door opening 1 × door opening: 645mm high × 485mm wide

Shelves 3 × shelves: 2 × adjustable height and 1 × floor mounted.

Top and middle adjustable height shelves: 470mm wide × 395mm deep

Bottom floor mounted shelf: 490mm wide × 180mm deep

Worktop n.a

Material 304 AISI stainless steel interior and exterior

**PERFORMANCE** 

Max. ambient temp. 30°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect 1°C to 15°C)

Total energy consumption 1.72 kWh/24hr

**ELECTRICAL** 

Climate class 4 (30°C/55% RH)

Interior lighting n.a

Power cord Supplied with 2.0m, 10 Amp plug and lead 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 1.0 Amps

REFRIGERATION

Controller SCS Connect (SKOPE-connect<sup>™</sup> compatible)

Connectivity interface
Refrigeration system
Refrigerant

Bluetooth® wireless technology
Built-in, integral, refrigeration system
R600a / 54g (natural refrigerant)

Nominal capacity

Heat rejection (Avg/peak)

Drainage

200 Watts

75 Watts/80 Watts

No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
	External	Internal	
Height	850mm	655mm	
Width	600mm	495mm	
Depth	635mm*	405mm	
Floor area	$0.38m^2$		
Weight	50kg		
Internal volume	129 litres		

<sup>\*</sup> Depth 635mm includes 35mm rear stand-off

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	Not required	
Sides	50mm each side	
Back	35mm (provided by rear stand-off)	
Bottom	30mm (provided by feet)	

PSS0663 Rev. 1.0 Mar. 2020



